



品 番	D	t	H	A	B	C	d	a	適 合			適合径
									電線管	SVケーブル	CVケーブル	
SSKT-D11(T)	11	1.2	12.2	15	22.8	15	6.5	5		$\phi 1.6 \times \frac{2}{3}C$ $2 \square \times \frac{2}{3}C$ $\phi 2.0 \times \frac{2}{3}C$ $3.5 \square \times 2C$ $14 \square \times 1C$	$\phi 1.6 \times \frac{2}{3}C$ $2 \square \times \frac{2}{3}C$ $\phi 2.0 \times \frac{2}{3}C$ $3.5 \square \times 2C$ $14 \square \times 1C$ $22 \square \times 1C$	$\phi 10 \sim 11.5$
SSKT-D13(T)	13	1.2	14.2	16	23.8	15	6.5	5		$\phi 2.0 \times 4C$ $2 \square \times \frac{2}{3}C$ $\phi 2.6 \times \frac{2}{3}C$ $3.5 \square \times \frac{2}{3}C$ $5.5 \square \times 2C$ $22 \square \times 1C$	$\phi 2.0 \times 4C$ $2 \square \times \frac{2}{3}C$ $\phi 2.6 \times \frac{2}{3}C$ $3.5 \square \times \frac{2}{3}C$ $5.5 \square \times 2C$ $38 \square \times 1C$	$\phi 12 \sim 13.5$
SSKT-D15T	15	1.2	16.2	17	24.8	15	6.5	5		$\phi 2.6 \times 4C$ $5.5 \square \times 3C$ $\phi 3.2 \times 2C$ $8 \square \times 2C$ $38 \square \times 1C$	$\phi 2.6 \times 4C$ $5.5 \square \times 3C$ $\phi 3.2 \times \frac{2}{3}C$ $8 \square \times \frac{2}{3}C$ $60 \square \times 1C$	$\phi 14 \sim 15.5$
SSKT-D17T	17	1.2	18.2	18	25.8	15	6.5	5		$\phi 3.2 \times \frac{3}{4}C$ $5.5 \square \times 4C$ $8 \square \times \frac{3}{4}C$ $60 \square \times 1C$	$\phi 3.2 \times 4C$ $5.5 \square \times 4C$ $8 \square \times 4C$	$\phi 16 \sim 17.5$
SSKT-14	18	1.2	19.2	22	30	20	6.5	5	G-14		$14 \square \times 3C$	$\phi 18 \sim 18.5$
SSKT-16	21	1.2	22.2	26	35	20	6.5	5	G-16	$22 \square \times 1C$	$22 \square \times \frac{2}{3}C$	$\phi 21 \sim 23$
SSKT-22	26.5	1.2	27.7	28	38	20	6.5	5	G-22	$38 \square \times \frac{2}{3}C$ $50 \square \times 2C$	$38 \square \times 4C$ $200 \square \times 1C$	$\phi 26.5 \sim 29$
SSKT-28	33.5	1.5	34.1	35	47	25	10	6	G-28	$60 \square \times 3C$ $80 \square \times 2C$	$60 \square \times 3C$ $400 \square \times 1C$	$\phi 33 \sim 36$
SSKT-36	42	1.5	41.6	41	54	25	10	6	G-36	$125 \square \times 2C$	$100 \square \times 3C$ $600 \square \times 1C$	$\phi 41.5 \sim 44$
SSKT-19	19.3	1.2	21	21.5	35	20	7	5.2	C-19	$14 \square \times \frac{3}{4}C$	$14 \square \times 4C$ $100 \square \times 1C$	$\phi 19 \sim 20$
SSKT-25	25.6	1.2	27.3	25	39	20	7	5.2	C-25	$30 \square \times 3C$ $38 \square \times 2C$	$38 \square \times \frac{3}{4}C$ $200 \square \times 1C$	$\phi 25 \sim 27$
SSKT-31	32	1.5	33.5	31	45	25	10	6	C-31	$50 \square \times 3C$ $60 \square \times 2C$	$60 \square \times \frac{3}{4}C$ $250 \square \times 1C$	$\phi 30 \sim 33$

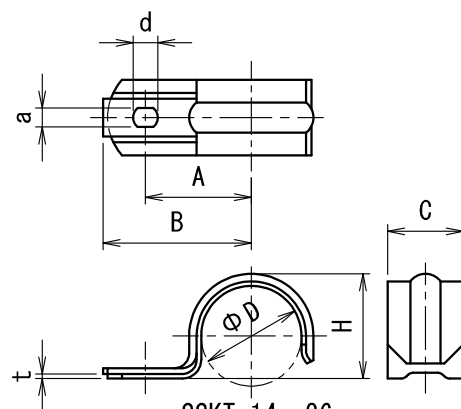

SSKT-14~36
SSKT-19~31

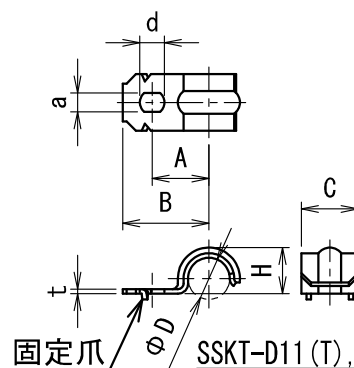

SSKT-D11(T), D13(T), D15T, D17T

3) サイズにより一部形状は異なる。

2) SSKT-D○○は、固定爪無し。

注1) SSKT-D○○Tは、固定爪付き。

-	-	SUS304	-	-
符号	名 称	材 質	個数	備 考

製 品 仕 様 図

尺度	品	ステンレス片サドル
-	名	SSKT- SSKT-D (T)
第三角法	図番	PV24271F 

未来工業株式会社