
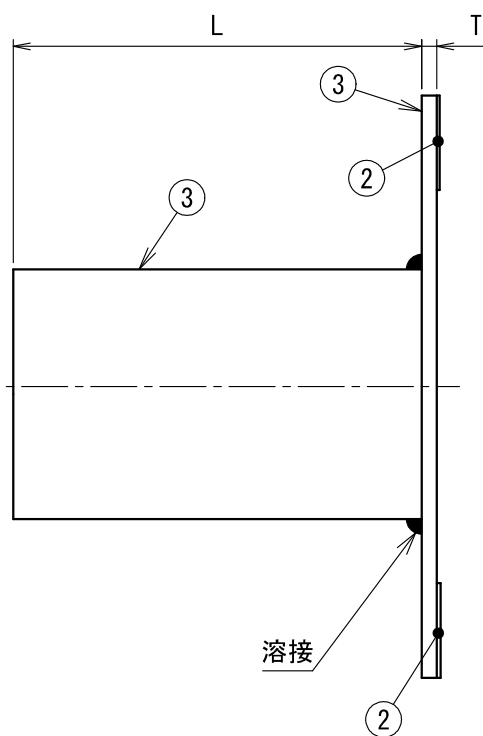


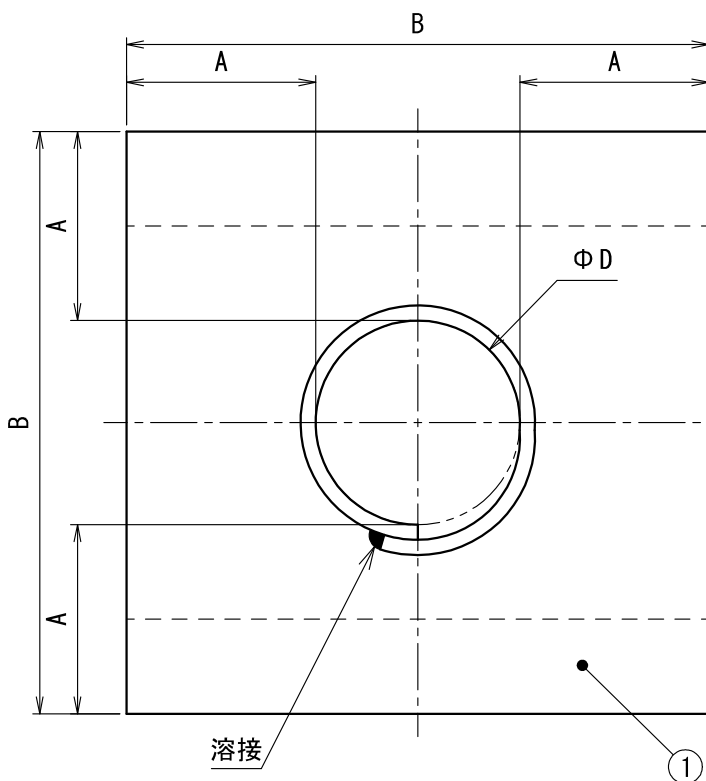

品番	φD	A	B	L	T (鉛当量)
XPk-16	24	50	126	49	2.0
XPk-22	32	50	134	65	2.0
XPk-28	38	50	140	77	2.0
XPk-36	47	50	149	95	2.0
XPk-42	54	50	156	109	2.0
XPk-54	68	50	170	137	2.0
XPk-70	78	50	180	157	2.0
XPk-82	95	50	197	191	2.0
XPk-92	105	50	207	211	2.0
XPk-104	120	50	222	241	2.0
X3K-16	24	50	126	49	3.0
X3K-22	32	50	134	65	3.0
X3K-28	38	50	140	77	3.0
X3K-36	47	50	149	95	3.0
X3K-42	54	50	156	109	3.0
X3K-54	68	50	170	137	3.0
X3K-70	78	50	180	157	3.0
X3K-82	95	50	197	191	3.0
X3K-92	105	50	207	211	3.0
X3K-104	120	50	222	241	3.0

■適合

呼び	PF	CD	VE	厚鋼	薄鋼
16	16	16	16	G16	C19
22	22	22	22	G22	C25
28	28	28	28	G28	C31
36	36	36	36	G36	C39
42	42	42	42	G42	C51
54	54	54	54	G54	C63
70	-	-	70	G70	C75
82	-	-	82	G82	-
92	-	-	-	G92	-
104	-	-	100	G104	-

注) 1. 開口穴径はφD以下とする。

製品仕様図		
尺度	品名	第三角法
-	X線防護用配管貫通部 処理カバー XPk- X3K-	C157771D3

3	保護テープ	-	-	-
2	両面テープ	-	2	基材: ポリイソ発泡 粘着剤: アクリル系
1	本体	PbP-1	1	JIS H 4301
符号	名称	材質	個数	備考

未来工業株式会社